


圧縮形直線スリーブ

■ 主に発電設備や大型工場内における銅電線の高圧送電設備で張力のかかる接続箇所に使します。

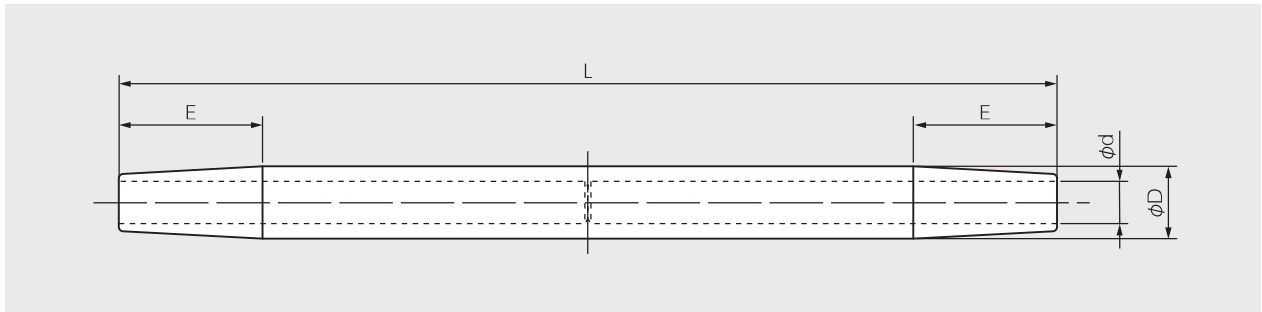

第一種硬銅撚線用

型番	サイズ (mm ²)	素線構成本数/径	導体外径 (円撚り線)	各部の寸法(mm)				適用六角ダイス 対角(mm)
				L	D	d	E	
OST-14YR	14	7/1.6	4.8	150	14	5.2	30	14
OST-22YR	22	7/2.0	6.0	150	14	6.4	30	14
OST-38YR	38	7/2.6	7.8	190	14	8.3	30	14
OST-60YR	60	19/2.0	10.0	240	19	10.6	40	19
OST-80YR	80	19/2.3	11.5	280	23	12.1	45	23
OST-100YR	100	19/2.6	13.0	310	23	13.6	45	23
OST-125YR	125	19/2.9	14.5	340	26	15.2	50	26
OST-150YR	150	37/2.3	16.1	380	29	16.9	60	29
OST-200YR	200	37/2.6	18.2	430	32	19.5	65	32
OST-250YR	250	61/2.3	20.7	500	38	21.9	75	38
OST-325YR	325	61/2.6	23.4	560	42	24.7	85	42
OST-400YR	400	61/2.9	26.1	620	47	27.4	95	47
OST-500YR	500	61/3.2	28.8	680	47	30.2	95	47

第二種(PH)

サイズ(mm ²)	素線構成本数/径	導体外径	各部の寸法(mm)				適用六角ダイス対角 (mm)
			L	D	d	E	
38	7/2.6	7.8	190	14	8.3	30	14
55	7/3.2	9.6	240	19	10.2	40	19
100	7/4.3	12.9	310	23	13.6	45	23
150	19/3.2	16.0	380	29	16.9	60	29
200	19/3.7	18.5	430	32	19.5	65	32

材質: JIS H3250 銅及び銅合金棒